

Distributed by



Mormax Company, Inc. 8 Westchester Plaza

Elmsford, NY 10523

914-699-0101

sales@mormax.com mormax.com

M-POWER-3T-ABY-B2AB(2)

Metro Light & Power's line of power & data solutions offers sophisticated design elements combined with greater ease of installation. Streamlined and low-profile, enhanced by side-exiting cords, our outlets advance the industry with their cutting-edge look and feel. We believe flexibility is key, and we provide a variety of mounting options, including the ability to mount in limited spaces. Our outlets are available in many finishes and configurations, in addition to a custom color and finish capability for our clients.

Bezel Finish: Custom Finishes Available SATIN BLACK (ABS) M-POWER-3T-ABY-B2AB(2)





Features:

Module/Port Options:

- A Tamper Resistant AC Receptacle
- B USB-A & USB-C (3.0A USB-A / 15W USB-C)
- U Double USB-A (Fast Charging Ports Rated for 3.2A)
- D AC Dimmer
- H HDMI
- 6 CAT 6
- 12 RJ 12
- X Switched AC
- Y 3-Way Switch
- C USB-C (27W High Speed Charging Port)
- Z USB-C (18W High Speed Charging Port)
- R Switched AC (Rocker Switch)

Plug:

Supplied with Low Profile Flat 45° Angle 120 VAC Plug Optional Standard Straight 120 VAC Plug Optional Straight 120 VAC Pass-through Plug Shown in Satin Black (ABS) Bezel, featuring 1 Tamper Resistant AC, 1 USB-A & 1 USB-C Charging Port, and one 3-Way Switch.

- CLEAN, COMPACT DESIGN
- STREAMLINED
- LOW PROFILE
- SIDE-EXITING CORDS
- PLUG & PLAY
- 3.0A USB-A / 15W USB-C HIGH SPEED CHARGING FOR ALL DEVICES
- TWIN OUTLETS WITH 3-WAY SWITCHING FOR LOW
 VOLTAGE LED LIGHTING
- 6' AC CORD & PLUG (FLAT PLUG STANDARD)
- CUSTOMIZABLE CONFIGURATIONS AND FINISHES
- UL LISTED FOR MOUNTING IN FURNITURE
- 15A

UL LISTED AND APPROVED FOR USE ONLY WITH METRO LIGHT AND POWER'S UL LISTED LEDS & CLASS 2 UL LISTED LED DRIVERS






Distributed by

MORMAX

Mormax Company, Inc. 8 Westchester Plaza Elmsford, NY 10523 914-699-0101 sales@mormax.com mormax.com

E491161

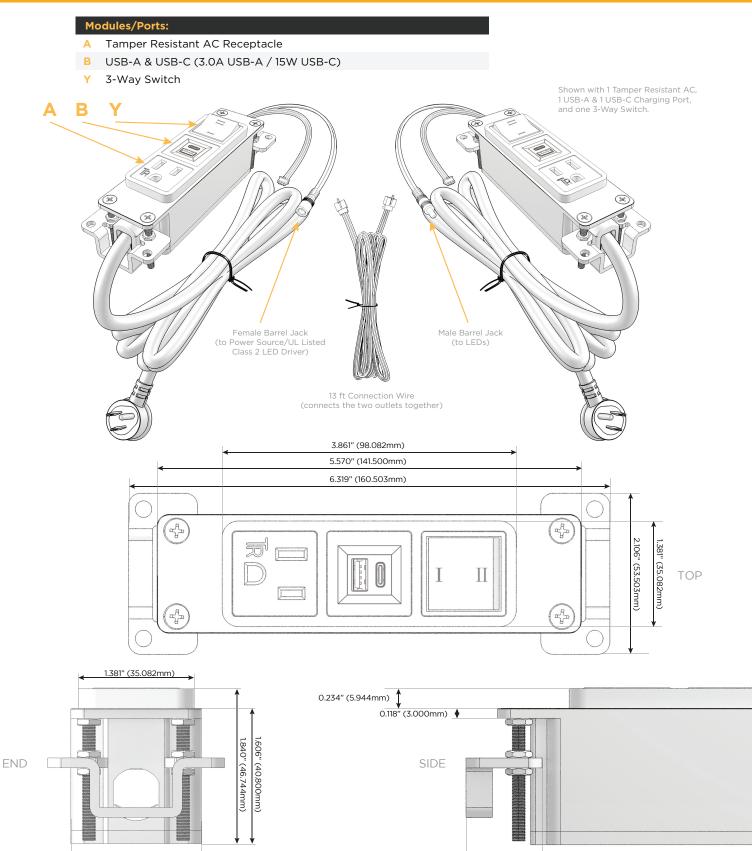

© 2023 Metro Light & Power, LLC. All rights reserved. US Patent No(s) 10,841,990; 10,847,959; other Patents Pending

1.555" (39.503mm)

0.905" (23.000mm)