

M-POWER-3T

AC POWER & DATA CONNECTIVITY SOLUTION

3TBR2-ABA-BR2ATP

Distributed by



Mormax Company, Inc.

8 Westchester Plaza Flmsford, NY 10523 sales@mormax.com


mormax.com

Metro Light & Power's line of power & data solutions offers sophisticated design elements combined with greater ease of installation. Streamlined and low-profile, enhanced by side-exiting cords, our outlets advance the industry with their cutting-edge look and feel. We believe flexibility is key, and we provide a variety of mounting options, including the ability to mount in limited spaces. Our outlets are available in many finishes and configurations, in addition to a custom color and finish capability for our clients.

Trim Plate Finish:

UNICOLOR™ BRASS (ABS)

Custom Finishes Available M-POWER-3TBR2-ABA-BR2ATP

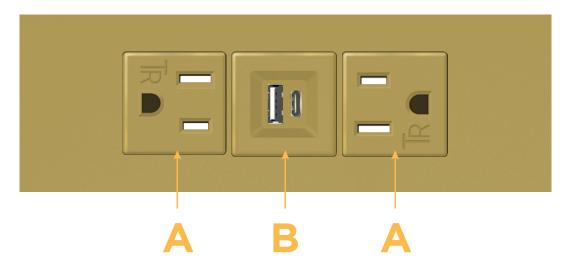

Features:

Module/Port Options:

- A Tamper Resistant AC Receptacle
- B USB-A & USB-C (3.0A USB-A / 15W USB-C)
- U Double USB-A (Fast Charging Ports Rated for 3.2A)
- D AC Dimmer
- H HDMI
- 6 CAT 6
- 12 RJ 12
- X Switched AC
- Y 3-Way Switch
- C USB-C (27W High Speed Charging Port)
- Z USB-C (18W High Speed Charging Port)
- R Switched AC (Rocker Switch)

Plug:

Supplied with Low Profile Flat 45° Angle 120 VAC Plug
Optional Standard Straight 120 VAC Plug
Optional Straight 120 VAC Pass-through Plug

Shown in Unicolor $^{\rm m}$ Brass (ABS) Trim Plate, featuring 2 Tamper Resistant ACs and 1 USB-A & 1 USB-C Charging Port.

- CLEAN, COMPACT DESIGN
- STREAMLINED
- LOW PROFILE
- SIDE-EXITING CORDS
- PLUG & PLAY
- 3.0A USB-A / 15W USB-C HIGH SPEED CHARGING FOR ALL DEVICES
- 6' AC CORD & PLUG (FLAT PLUG STANDARD)
- CUSTOMIZABLE CONFIGURATIONS AND FINISHES
- UL LISTED FOR MOUNTING IN FURNITURE
- 15A





Mormax Company, Inc. 8 Westchester Plaza

Elmsford, NY 10523

TOP


914-699-0101

sales@mormax.com mormax.com


Modules/Ports:

- Tamper Resistant AC Receptacle
- USB-A & USB-C (3.0A USB-A / 15W USB-C)

2.000" (50.800mm) 2.106" (53.503mm) Shown with 2 Tamper Resistant ACs 6.000" (152.403mm) 6.319" (160.503mm) and 1 USB-A &USB-C Charging Port. Optional Straight 120 VAC Pass-through Plug 0.619" (15.746mm) 1.141" 0.984 (29.00mm) (25.00mm 0.613" (15.594m



Ø 1.132' (28.766mm)

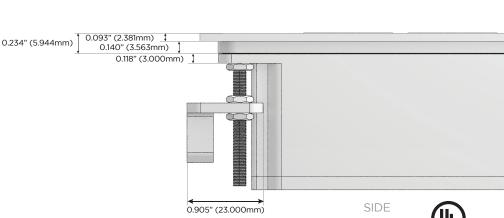

1.704" (43.300mm)

2.515" (63.900mm)