

# M-POWER-4T

## AC POWER & DATA CONNECTIVITY SOLUTION

ΛΤ-ΔΔΔΔ-ΒΔΕ

Distributed by



Mormax Company, Inc.

8 Westchester Plaza Elmsford, NY 10523 **914-699-0101** 

sales@mormax.com


mormax.com

Metro Light & Power's line of power & data solutions offers sophisticated design elements combined with greater ease of installation. Streamlined and low-profile, enhanced by side-exiting cords, our outlets advance the industry with their cutting-edge look and feel. We believe flexibility is key, and we provide a variety of mounting options, including the ability to mount in limited spaces. Our outlets are available in many finishes and configurations, in addition to a custom color and finish capability for our clients.

Bezel Finish:

**BLACK (ABS)** 

Custom Finishes Available M-POWER-4T-AAAA-BAB

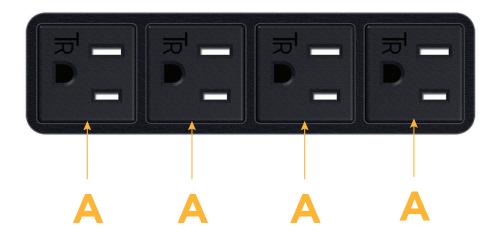

### Features:

#### **Module/Port Options:**

- A Tamper Resistant AC Receptacle
- U Double USB (Fast Charging Ports Rated for 3.2A)
- H HDMI
- 6 CAT 6
- 12 RJ 12
- X Switched AC
- Y 3-Way Switch
- C USB-C (27W High Speed Charging Port)
- Z USB-C (18W High Speed Charging Port)
- R Switched AC (Rocker Switch)

#### Plug:

Supplied with Low Profile Flat 45° Angle 120 VAC Plug

Optional Standard Straight 120 VAC Plug

Optional Straight 120 VAC Pass-through Plug

Shown in Black (ABS) Bezel, featuring 4 Tamper Resistant ACs.

- CLEAN, COMPACT DESIGN
- STREAMLINED
- LOW PROFILE
- SIDE-EXITING CORDS
- PLUG & PLAY
- 6' AC CORD & PLUG (FLAT PLUG STANDARD)
- CUSTOMIZABLE CONFIGURATIONS AND FINISHES
- UL LISTED FOR MOUNTING IN FURNITURE
- 15A





Distributed by



Mormax Company, Inc.
8 Westchester Plaza

Elmsford, NY 10523

914-699-0101 sales@mormax.com

mormax.com

TOP Modules/Ports: Specs: 1.381" (35.082mm) Tamper Resistant AC Receptacle 2.106" (53.503mm) 7.559" (192.003mm) 6.811" (173.000mm) 5.101" (129.582mm) Shown with 4 Tamper Resistant ACs. Optional Straight 120 VAC 0.619" (15.746mm) 0.613" (15.594mm) 1.704" (43.300mm) 2.515" (63.900mm) 1.381" (35.082mm) 0.234" (5.944mm) 0.118" (3.000mm) 1.840" (46.744mm) .606" (40.800mm) END SIDE



1.555" (39.503mm)

0.905" (23.000mm)