

# M-POWER-4T

## **AC POWER & DATA CONNECTIVITY SOLUTION**

4T-AUAB-BAB

Distributed by



Mormax Company, Inc.

8 Westchester Plaza Flmsford, NY 10523 **914-699-0101** 

sales@mormax.com


mormax.com

Metro Light & Power's line of power & data solutions offers sophisticated design elements combined with greater ease of installation. Streamlined and low-profile, enhanced by side-exiting cords, our outlets advance the industry with their cutting-edge look and feel. We believe flexibility is key, and we provide a variety of mounting options, including the ability to mount in limited spaces. Our outlets are available in many finishes and configurations, in addition to a custom color and finish capability for our clients.

Bezel Finish:

**BLACK (ABS)** 

Custom Finishes Available M-POWER-4T-AUAB-BAB

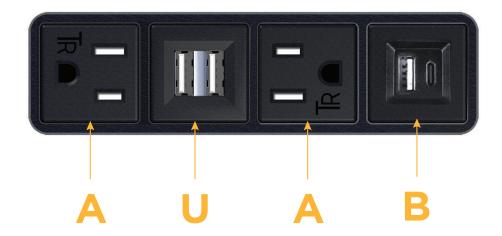

### Features:

#### **Module/Port Options:**

- A Tamper Resistant AC Receptacle
- B USB-A & USB-C (3.0A USB-A / 15W USB-C)
- U Double USB (Fast Charging Ports Rated for 3.2A)
- H HDMI
- 6 CAT 6
- 12 RJ 12
- X Switched AC
- Y 3-Way Switch
- C USB-C (27W High Speed Charging Port)
- Z USB-C (18W High Speed Charging Port)
- R Switched AC (Rocker Switch)

#### Plug:

Supplied with Low Profile Flat 45° Angle 120 VAC Plug Optional Standard Straight 120 VAC Plug Optional Straight 120 VAC Pass-through Plug Shown in Black (ABS) Bezel, featuring 2 Tamper Resistant ACs, 1 Double USB-A Charging Port, and 1 USB-A & 1 USB-C Charging Port.

- CLEAN, COMPACT DESIGN
- STREAMLINED
- LOW PROFILE
- SIDE-EXITING CORDS
- PLUG & PLAY
- 3.2A HIGH SPEED USB CHARGING FOR ALL DEVICES
- 3.0A USB-A / 15W USB-C HIGH SPEED CHARGING FOR ALL DEVICES
- 6' AC CORD & PLUG (FLAT PLUG STANDARD)
- CUSTOMIZABLE CONFIGURATIONS AND FINISHES
- UL LISTED FOR MOUNTING IN FURNITURE





Mormax Company, Inc.

TOP

1.381" (35.082mm)

**914-699-0101** sales@mormax.com


8 Westchester Plaza Elmsford, NY 10523


mormax.com

Specs:

## Modules/Ports:

- Tamper Resistant AC Receptacle
- U Double USB (Fast Charging Ports - Rated for 3.2A)

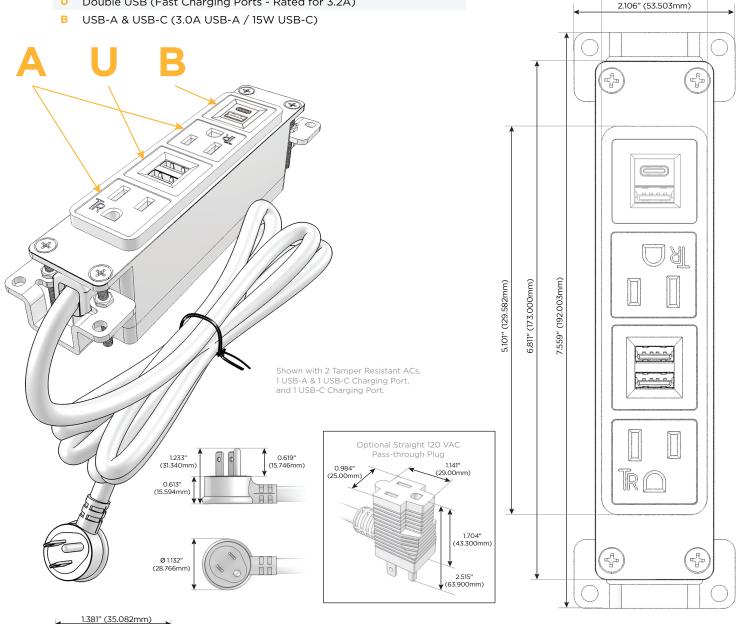



0.093" (2.381mm) 0.140" (3.563mm) 0.118" (3.000mm) 1 SIDE 0.905" (23.000mm)

0.234" (5.944mm)