

M-POWER-5T-ABAYR-SATP(2)

Distributed by



Mormax Company, Inc. 8 Westchester Plaza Elmsford, NY 10523

B 914-699-0101


sales@mormax.com

 $\mathscr{S}$ mormax.com

Metro Light & Power's line of power & data solutions offers sophisticated design elements combined with greater ease of installation. Streamlined and low-profile, enhanced by side-exiting cords, our outlets advance the industry with their cutting edge look and feel. We believe flexibility is key, and we provide a variety of mounting options, including the ability to mount in limited spaces. Our outlets are available in many finishes and configurations, in addition to a custom color and finish capability for our clients.

## Trim Plate Finish: SATIN NICKEL (ABS) Custom Finishes Available

M-POWER-5T-ABAYR-SATP(2)

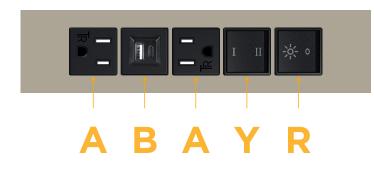

## Features:

- **Module/Port Options:**
- Α **Tamper Resistant AC Receptacle**
- USB-A & USB-C (3.0A USB-A / 15W USB-C) В
- Double USB-A (Fast Charging Ports Rated for 3.2A)
- H HDMI
- CAT 6 6
- 12 RJ 12
- X Switched AC
- Y 3-Way Switch (Low Voltage)
- C USB-C (27W High Speed Charging Port)
- Z USB-C (18W High Speed Charging Port)
- R Switched AC (Rocker Switch)
- D Dimmer Switch

## Plug:

Supplied with Low Profile Flat 45° Angle 120 VAC Plug **Optional Standard Straight 120 VAC Plug Optional Straight 120 VAC Pass-through Plug** 

- - CLEAN, COMPACT DESIGN
  - STREAMLINED
  - LOW PROFILE
  - SIDE-EXITING CORDS
  - **PLUG & PLAY**
  - 6' AC CORD & PLUG (FLAT PLUG STANDARD)
  - CUSTOMIZABLE CONFIGURATIONS AND FINISHES
  - **UL LISTED FOR MOUNTING IN FURNITURE**
  - 15A

UL LISTED AND APPROVED FOR USE ONLY WITH METRO LIGHT & POWER'S UL LISTED LEDS & CLASS 2 UL LISTED LED DRIVERS





M-POWER-5T-ABAYR-SATP(2)

END

1.555" (39.503mm)

Distributed by




Mormax Company, Inc. 8 Westchester Plaza Elmsford, NY 10523 ♦ 914-699-0101
✓ sales@mormax.com

mormax.com

E49116

## Modules/Ports:

- A Tamper Resistant AC Receptacle
- B USB-A & USB-C (3.0A USB-A / 15W USB-C)
- Y 3-Way Switch
- R Switched AC (Rocker Switch)

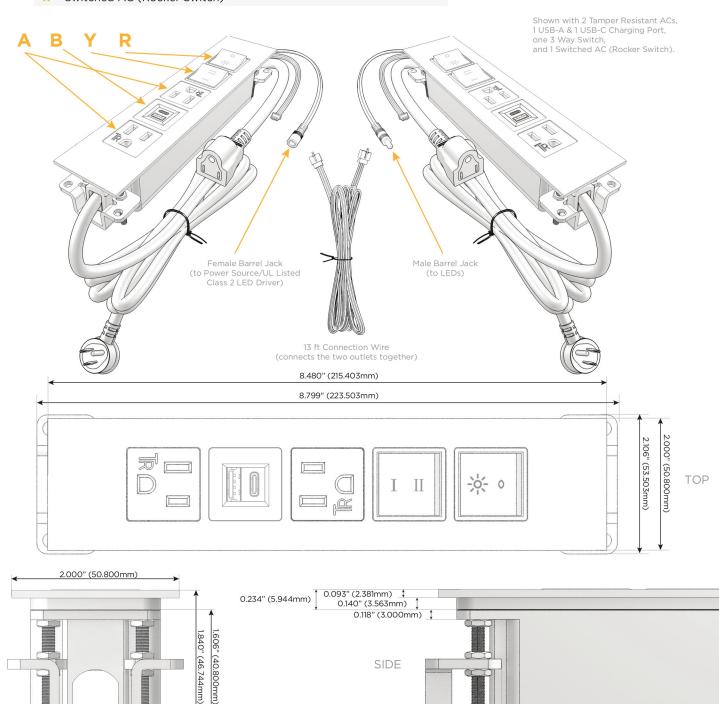

0.905" (23.000mm)