



PSMR-COB

LINEAR LED LIGHTING SOLUTIONS

Distributed by



Mormax Company, Inc. 914-699-0101
 8 Westchester Plaza sales@mormax.com
 Elmsford, NY 10523 mormax.com

PSMR Flexible Linear White LED Lighting is available in 12 V DC or 24 V DC, 3000K, 9 LEDs/ft. (30 LEDs/M) to 36 LEDs/ft. (120 LEDs/M.) Direct mounting via attached enhanced 3M Thermal Dissipating Tape. Available in IP20, IP67 and IP68.

LED pitch and Lumen output can be customized.


Features:

LEDs/ft	27
LEDs/M	320
Lm/ft	180
Lm/M	590
Power Consumption (W/ft.)	1.85
Power Consumption (W/M)	6.00
Lm/W	900
CRI	> 90
Operating Voltage (DC)	24
Operating Temp Range (°C)	-25°C - 70°C

- UL LISTED
- CLASS 2
- LM80 >80,000 HRS
- HEAVY WEIGHT COPPER TRACES FOR ENHANCED THERMAL DISSIPATION



COB

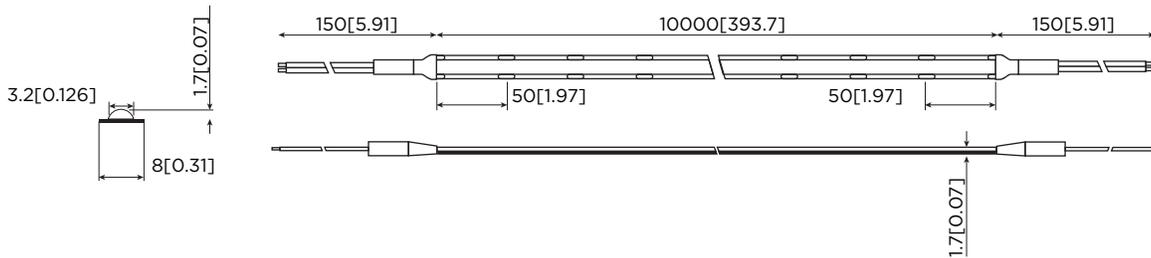

Order Codes:

PSMR	VDC	LED PKG	CCT	CRI	IP	LEDs/M	W/M	Length (")	Length (cm)
								specify in inches	specify in centimeters
PSMR	12	3528 (WHITE)	6500	> 90	20	320	6		
	24		5700	> 90	67	60	12		
			5000	> 90	68	72	14.4		
			4500	> 90		99	19.8		
			4000	> 90		120	24		
			3500	> 90					
			3000	> 90					
			2700	> 90					

Photometrics, and additional spec. info is available upon request.

