

## M-POWER-1T+1T

**AC POWER & DATA CONNECTIVITY SOLUTION** 

M-POWER-1TRZ-A+1TRZ-A-RZRNDSB




Metro Light & Power's line of power & data solutions offers sophisticated design elements combined with greater ease of installation. Streamlined and low-profile, enhanced by side-exiting cords, our outlets advance the industry with their cutting edge look and feel. We believe flexibility is key, and we provide a variety of mounting options, including the ability to mount in limited spaces. Our outlets are available in many finishes and configurations, in addition to a custom color and finish capability for our clients.

Bezel Finish: Custom Finishes Available

#### UNICOLOR™ OIL RUBBED BRONZE (ABS)

vailable M-POWER-1TRZ-A+1TRZ-A-RZRNDSB

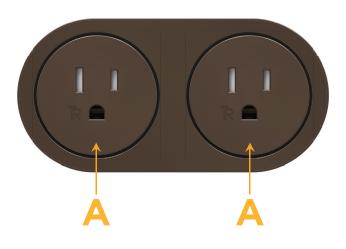

#### Features:

#### Module/Port Options:

- A Tamper Resistant AC Receptacle
- E USB-A & USB-C (20W)
- M Double USB-A (Fast Charging Ports 18W)
- H HDMI
- 6 CAT 6
- 12 RJ 12
- X Switched AC
- Y 3-Way Switch (Low Voltage)
- V USB-C (45W High Speed Charging Port)
- S USB-C (25W High Speed Charging Port)
- R Switched AC (Rocker Switch)
- D Dimmer Switch

#### Plug:

Supplied with Low Profile Flat 45° Angle 120 VAC Plug

- Optional Standard Straight 120 VAC Plug
- Optional Straight 120 VAC Pass-through Plug

- CLEAN, COMPACT DESIGN
- STREAMLINED
- LOW PROFILE
- SIDE-EXITING CORDS
- PLUG & PLAY
- 6' AC CORD & PLUG (FLAT PLUG STANDARD)
- CUSTOMIZABLE CONFIGURATIONS AND FINISHES
- UL LISTED FOR MOUNTING IN FURNITURE
- 15A





# M-POWER-1T+1T

### **AC POWER & DATA CONNECTIVITY SOLUTION**

M-POWER-1TRZ-A+1TRZ-A-RZRNDSB

Specs:

#### Modules/Ports:

Α Tamper Resistant AC Receptacle


MORMAX 


Mormax Company, Inc. 🕓 914-699-0101 8 Westchester Plaza  $\bigtriangledown$ Elmsford, NY 10523

Distributed by

sales@mormax.com 🔗 mormax.com

GE Ð 2.204" (56.000mm) 3.129" (79.500mm) 3.543" (90.000mm) ੰ₿ r A Ŧ 4.663" (118.450mm) Optional Straight 120 VAC 1.233' 0.619" Pass-through Plug (31.340mm) (15.746mm) 1.141″ (29.00mm) 0.984" (25.00mn 0.613" Ŧ A (15.594mm) AA Œ 1.704" . Ol (43.300mm) f f Ø 1.132 (28.766mm) 2.515" (63.900mm)

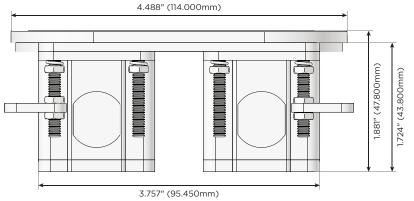

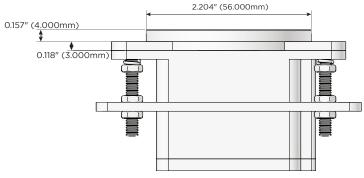



4.488" (114.000mm) 3.757" (95.450mm)