

### AC POWER & DATA CONNECTIVITY SOLUTION

M-POWER-2TBZ2-ES-BZ2RNDSB

Distributed by



Mormax Company, Inc. 8 Westchester Plaza

Elmsford, NY 10523


914-699-0101

sales@mormax.com mormax.com

Metro Light & Power's line of power & data solutions offers sophisticated design elements combined with greater ease of installation. Streamlined and low-profile, enhanced by side-exiting cords, our outlets advance the industry with their cutting edge look and feel. We believe flexibility is key, and we provide a variety of mounting options, including the ability to mount in limited spaces. Our outlets are available in many finishes and configurations, in addition to a custom color and finish capability for our clients.

UNICOLOR™ BRONZE (ZINC/STEEL) Bezel Finish:

M-POWER-2TBZ2-ES-BZ2RNDSB



# Features:

## **Module/Port Options:**

- **Tamper Resistant AC Receptacle**
- USB-A & USB-C (20W)
- Double USB-A (Fast Charging Ports 18W)
- **HDMI**
- CAT 6
- 12 RJ 12
- Switched AC
- 3-Way Switch (Low Voltage)
- USB-C (45W High Speed Charging Port)
- USB-C (25W High Speed Charging Port)
- R Switched AC (Rocker Switch)
- **Dimmer Switch**

Supplied with Low Profile Flat 45° Angle 120 VAC Plug

Optional Standard Straight 120 VAC Plug

Optional Straight 120 VAC Pass-through Plug

- CLEAN, COMPACT DESIGN
- STREAMLINED
- LOW PROFILE
- SIDE-EXITING CORDS
- **PLUG & PLAY**
- 6' AC CORD & PLUG (FLAT PLUG STANDARD)
- **CUSTOMIZABLE CONFIGURATIONS AND FINISHES**
- **UL LISTED FOR MOUNTING IN FURNITURE**
- 15A





## AC POWER & DATA CONNECTIVITY SOLUTION

M-POWER-2TBZ2-ES-BZ2RNDSB

Distributed by



Mormax Company, Inc.
8 Westchester Plaza

Elmsford, NY 10523

 $\mathcal{C}$ 

914-699-0101


sales@mormax.com mormax.com


Specs: Modules/Ports:

E USB-A & USB-C (20W)

S USB-C (25W High Speed Charging Port)

TOP 2.106" (53.503mm) 2.834" (72.000mm) 4.370" (III.000mm) 5.118" (130.003mm) Optional Straight 120 VAC 0.619" (15.746mm) 1.233' Pass-through Plug 1 141" 0.984" (25.00mm) (29.00mm) (15.594mm) 1.704" (43.300mm) Ø 1.132" (28.766mm)



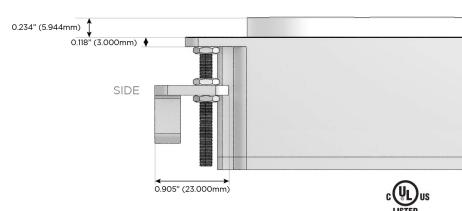

2.515" (63.900mm)