

AC POWER & DATA CONNECTIVITY SOLUTION

M-POWER-2TW-D-BZTP

Distributed by



Mormax Company, Inc.
8 Westchester Plaza

Elmsford, NY 10523

 \triangle

914-699-0101 sales@mormax.com

mormax.com


Metro Light & Power's line of power & data solutions offers sophisticated design elements combined with greater ease of installation. Streamlined and low-profile, enhanced by side-exiting cords, our outlets advance the industry with their cutting edge look and feel. We believe flexibility is key, and we provide a variety of mounting options, including the ability to mount in limited spaces. Our outlets are available in many finishes and configurations, in addition to a custom color and finish capability for our clients.

Trim Plate Finish

Custom Finishes Available

Trim Plate Finish: **SOLID BRONZE**

M-POWER-2TW-D-BZTP

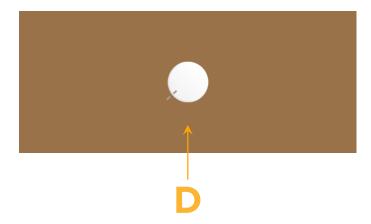

Features:

Module/Port Options:

- A Tamper Resistant AC Receptacle
- E USB-A & USB-C (20W)
- M Double USB-A (Fast Charging Ports 18W)
- H HDMI
- 6 CAT 6
- 12 RJ 12
- X Switched AC
- Y 3-Way Switch (Low Voltage)
- V USB-C (45W High Speed Charging Port)
- S USB-C (25W High Speed Charging Port)
- R Switched AC (Rocker Switch)
- **D** Dimmer Switch

Plug:

Supplied with Low Profile Flat 45° Angle 120 VAC Plug

Optional Standard Straight 120 VAC Plug

Optional Straight 120 VAC Pass-through Plug

- CLEAN, COMPACT DESIGN
- STREAMLINED
- LOW PROFILE
- SIDE-EXITING CORDS
- PLUG & PLAY
- 6' AC CORD & PLUG (FLAT PLUG STANDARD)
- CUSTOMIZABLE CONFIGURATIONS AND FINISHES
- ETL LISTED FOR MOUNTING IN FURNITURE
- 15A





AC POWER & DATA CONNECTIVITY SOLUTION

1.555" (39.503mm)

Dimmer Switch

M-POWER-2TW-D-BZTP

Specs:

MORMAX

Mormax Company, Inc.
8 Westchester Plaza

Elmsford, NY 10523

0.905" (23.000mm)

Distributed by

<u>@</u>

914-699-0101

mormax.com

 \searrow

sales@mormax.com

W-D-BZTP

Modules/Ports:

TOP 2.000" (50.800mm) 2.106" (53.503mm) 4.759" (120.903mm) 5.118" (130.003mm) Optional Straight 120 VAC 0.619" (15.746mm) 1.233' Pass-through Plug 1 141" 0.984" (25.00mm) (29.00mm) (15.594mm) 1.704" (43.300mm) Ø 1.132" (28.766mm) 2.515" (63.900mm) 2.000" (50.800mm) 0.582" (14.800mm) 0.669" (17.000mm) 0.093" (2.381mm) ‡ 0.140" (3.563mm) 0.234" (5.944mm) 0.118" (3.000mm) .606" (40.800mm) SIDE END