

### AC POWER & DATA CONNECTIVITY SOLUTION

M-POWER-3T-AMY-APRNDSB(2)

Distributed by



Mormax Company, Inc. 8 Westchester Plaza

Elmsford, NY 10523

914-699-0101


sales@mormax.com mormax.com

Metro Light & Power's line of power & data solutions offers sophisticated design elements combined with greater ease of installation. Streamlined and low-profile, enhanced by side-exiting cords, our outlets advance the industry with their cutting edge look and feel. We believe flexibility is key, and we provide a variety of mounting options, including the ability to mount in limited spaces. Our outlets are available in many finishes and configurations, in addition to a custom color and finish capability for our clients.

#### Bezel Finish: SPECIAL ANTIQUE BRONZE (ZINC/STEEL)

M-POWER-3T-AMY-APRNDSB(2)





#### Features:

## **Module/Port Options:**

- **Tamper Resistant AC Receptacle**
- USB-A & USB-C (20W)
- Double USB-A (Fast Charging Ports 18W)
- HDMI
- CAT 6
- 12 RJ 12
- Switched AC
- 3-Way Switch (Low Voltage)
- V USB-C (45W High Speed Charging Port)
- USB-C (25W High Speed Charging Port)
- R Switched AC (Rocker Switch)
- **Dimmer Switch**

## Plug:

Supplied with Low Profile Flat 45° Angle 120 VAC

Optional Standard Straight 120 VAC Plug

Optional Straight 120 VAC Pass-through Plug

- CLEAN, COMPACT DESIGN
- **STREAMLINED**
- LOW PROFILE
- SIDE-EXITING CORDS
- **PLUG & PLAY**
- 6' AC CORD & PLUG (FLAT PLUG STANDARD)
- **CUSTOMIZABLE CONFIGURATIONS AND FINISHES**
- **UL LISTED FOR MOUNTING IN FURNITURE**
- 15A

UL LISTED AND APPROVED FOR USE ONLY WITH METRO LIGHT & POWER'S UL LISTED LEDS & CLASS 2 UL LISTED LED DRIVERS





# AC POWER & DATA CONNECTIVITY SOLUTION

M-POWER-3T-AMY-APRNDSB(2)

Distributed by



Mormax Company, Inc.
8 Westchester Plaza

Elmsford, NY 10523

<u>C</u>

914-699-0101

mormax.com


 $\overline{}$ 

sales@mormax.com

A Tamper Resistant AC Receptacle

M Double USB-A (Fast Charging Ports - 18W)

Y 3-Way Switch

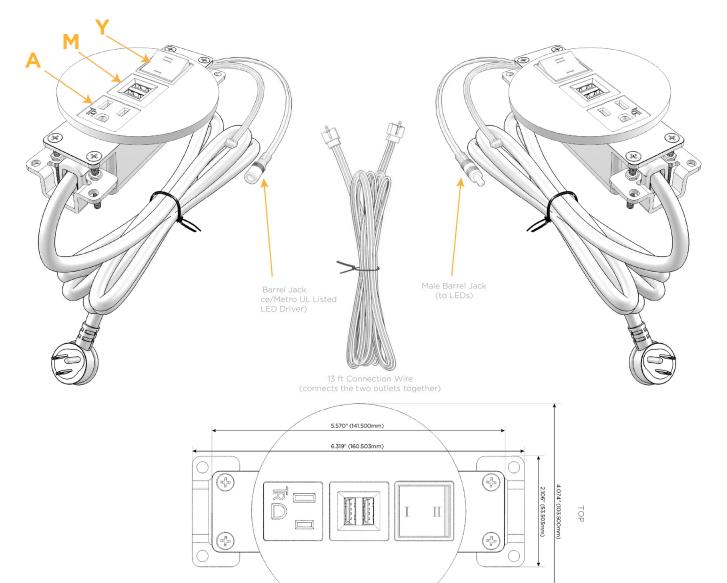

4.074" (103.500mm)

1.606" (40.800mm)

1.606" (40.800mm)

1.555" (39.503mm)

