

M-POWER-3TW-RA6-BZ5RNDSB

Distributed by



Mormax Company, Inc. 8 Westchester Plaza Elmsford, NY 10523

914-699-0101

sales@mormax.com

mormax.com

Metro Light & Power's line of power & data solutions offers sophisticated design elements combined with greater ease of installation. Streamlined and low-profile, enhanced by side-exiting cords, our outlets advance the industry with their cutting edge look and feel. We believe flexibility is key, and we provide a variety of mounting options, including the ability to mount in limited spaces. Our outlets are available in many finishes and configurations, in addition to a custom color and finish capability for our clients.

### Bezel Finish: ARCHITECTURAL BRONZE (ZINC/STEEL) M-POWER-3TW-RA6-BZ5RNDSB

Custom Finishes Available

### Features:

## **Module/Port Options:**

- **Tamper Resistant AC Receptacle** Α
- Е USB-A & USB-C (20W)
- Double USB-A (Fast Charging Ports 18W) M
- н HDMI
- 6 CAT 6
- 12 RJ 12
- X Switched AC
- V 3-Way Switch (Low Voltage)
- USB-C (45W High Speed Charging Port) V
- USB-C (25W High Speed Charging Port) S
- Switched AC (Rocker Switch) R
- **Dimmer Switch**

### Plug:

Supplied with Low Profile Flat 45° Angle 120 VAC Plug

**Optional Standard Straight 120 VAC Plug** 

**Optional Straight 120 VAC Pass-through Plug** 

- CLEAN, COMPACT DESIGN
- STREAMLINED
- LOW PROFILE
- SIDE-EXITING CORDS
- **PLUG & PLAY**
- 6' AC CORD & PLUG (FLAT PLUG STANDARD)
- CUSTOMIZABLE CONFIGURATIONS AND FINISHES
- UL LISTED FOR MOUNTING IN FURNITURE
- 15A



# M-POWER-3T

# AC POWER & DATA CONNECTIVITY SOLUTION

M-POWER-3TW-RA6-BZ5RNDSB




Mormax Company, Inc. 8 Westchester Plaza Elmsford, NY 10523 ♦ 914-699-0101
✓ sales@mormax.com

VL)us

LISTED

E491161

mormax.com

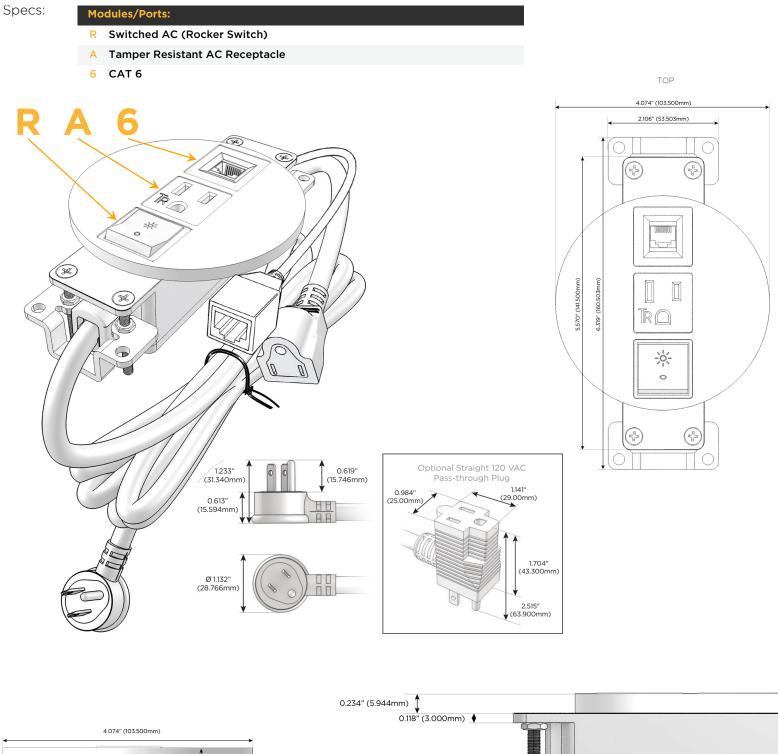

SIDE

0.905" (23.000mm)

© 2024 Metro Light & Power, LLC. All rights reserved. US Patent No(s) 10,841,990; 10,847,959; other Patents Pending Metro Light & Power, LLC | 11 Smith St Englewood, NJ 07631 | T: 201-416-4160 | F: 208-979-4613 | info@metrolightandpower.com | www.metrolightandpower.com

1.606" (40.800mm) 1.840" (46.744mm)

1.555" (39.503mm)

END