

#### AC POWER & DATA CONNECTIVITY SOLUTION

M-POWER-4T-RAAR-BZ5AB

Distributed by



Mormax Company, Inc. 8 Westchester Plaza

914-699-0101 sales@mormax.com


mormax.com

Elmsford, NY 10523 Metro Light & Power's line of power & data solutions offers sophisticated design elements combined with greater ease of installation.

Streamlined and low-profile, enhanced by side-exiting cords, our outlets advance the industry with their cutting edge look and feel. We believe flexibility is key, and we provide a variety of mounting options, including the ability to mount in limited spaces. Our outlets are available in many finishes and configurations, in addition to a custom color and finish capability for our clients.

#### Bezel Finish: ARCHITECTURAL BRONZE (ABS)

Custom Finishes Available M-POWER-4T-RAAR-BZ5AB

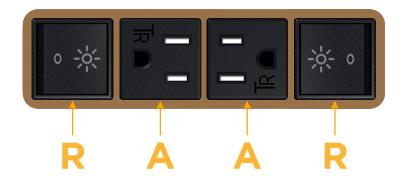

# Features:

## **Module/Port Options:**

- **Tamper Resistant AC Receptacle**
- USB-A & USB-C (20W)
- Double USB-A (Fast Charging Ports 18W)
- **HDMI**
- CAT 6
- **RJ 12**
- Switched AC
- 3-Way Switch (Low Voltage)
- V USB-C (45W High Speed Charging Port)
- USB-C (25W High Speed Charging Port)
- Switched AC (Rocker Switch)
- D Dimmer Switch

### Plug:

Supplied with Low Profile Flat 45° Angle 120 VAC Plug

Optional Standard Straight 120 VAC Plug

Optional Straight 120 VAC Pass-through Plug

- CLEAN, COMPACT DESIGN
- **STREAMLINED**
- **LOW PROFILE**
- SIDE-EXITING CORDS
- **PLUG & PLAY**
- 6' AC CORD & PLUG (FLAT PLUG STANDARD)
- **CUSTOMIZABLE CONFIGURATIONS AND FINISHES**
- **UL LISTED FOR MOUNTING IN FURNITURE**
- 15A





## AC POWER & DATA CONNECTIVITY SOLUTION

M-POWER-4T-RAAR-BZ5AB

Specs:

Distributed by



Mormax Company, Inc.
8 Westchester Plaza

Elmsford, NY 10523

<u>&</u>

914-699-0101

sales@mormax.com mormax.com

TOP

Modules/Ports:

R Switched AC (Rocker Switch)

A Tamper Resistant AC Receptacle

1.381" (35.082mm) 2.106" (53.503mm) -;\\ (192.003mm) 6.811" (173.000mm) 7.559" ( Optional Straight 120 VAC 0.619" (15.746mm) 1.233' Pass-through Plug 1 141" 0.984" (25.00mm) (29.00mm) (15.594mm) 1.704" (43.300mm) Ø 1.132" (28.766mm) 2.515" (63.900mm)

