

#### AC POWER & DATA CONNECTIVITY SOLUTION

M-POWER-4TW-AA66-CHAB

# Distributed by



Mormax Company, Inc.


8 Westchester Plaza Elmsford, NY 10523 914-699-0101

sales@mormax.com
mormax.com

Metro Light & Power's line of power & data solutions offers sophisticated design elements combined with greater ease of installation. Streamlined and low-profile, enhanced by side-exiting cords, our outlets advance the industry with their cutting edge look and feel. We believe flexibility is key, and we provide a variety of mounting options, including the ability to mount in limited spaces. Our outlets are available in many finishes and configurations, in addition to a custom color and finish capability for our clients.

Bezel Finish: CHAMPAGNE (ABS)

Custom Finishes Available M-POWER-4TW-AA66-CHAB

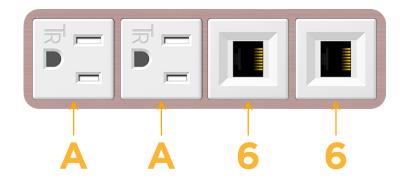

### Features:

# **Module/Port Options:**

- A Tamper Resistant AC Receptacle
- E USB-A & USB-C (20W)
- M Double USB-A (Fast Charging Ports 18W)
- H HDMI
- 6 CAT 6
- 12 RJ 12
- X Switched AC
- Y 3-Way Switch (Low Voltage)
- V USB-C (45W High Speed Charging Port)
- S USB-C (25W High Speed Charging Port)
- R Switched AC (Rocker Switch)
- D Dimmer Switch

### Plug:

Supplied with Low Profile Flat 45° Angle 120 VAC Plug

Optional Standard Straight 120 VAC Plug

Optional Straight 120 VAC Pass-through Plug

- CLEAN, COMPACT DESIGN
- STREAMLINED
- LOW PROFILE
- SIDE-EXITING CORDS
- PLUG & PLAY
- 6' AC CORD & PLUG (FLAT PLUG STANDARD)
- CUSTOMIZABLE CONFIGURATIONS AND FINISHES
- UL LISTED FOR MOUNTING IN FURNITURE
- 15A





#### AC POWER & DATA CONNECTIVITY SOLUTION

M-POWER-4TW-AA66-CHAB

Specs:

Distributed by



Mormax Company, Inc. 8 Westchester Plaza

Elmsford, NY 10523

<u>&</u>

914-699-0101

mormax.com

TOP

 $\subseteq$ 

sales@mormax.com


W-AA66-CHAB


Modules/Ports:

**Tamper Resistant AC Receptacle** 

6 CAT 6

1.381" (35.082mm) 2.106" (53.503mm) TUUUUUUU TUUUUUUU (192.003mm) 6.811" (173.000mm) 7.559" ( Optional Straight 120 VAC 0.619" (15.746mm) 1.233' Pass-through Plug 1 141" 0.984" (25.00mm) (29.00mm) (15.594mm) 1.704" (43.300mm) Ø 1.132" (28.766mm)



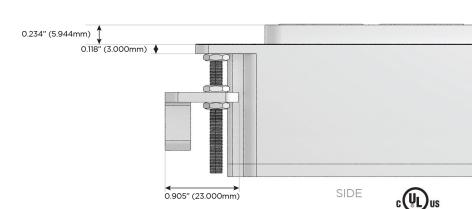

2.515" (63.900mm)