

AC POWER & DATA CONNECTIVITY SOLUTION

M-POWER-4TW-AMYR-BZ4B(2)

Distributed by



Mormax Company, Inc. 8 Westchester Plaza

914-699-0101

sales@mormax.com

 \mathcal{S} Elmsford, NY 10523

mormax.com

Metro Light & Power's line of power & data solutions offers sophisticated design elements combined with greater ease of installation. Streamlined and low-profile, enhanced by side-exiting cords, our outlets advance the industry with their cutting edge look and feel. We believe flexibility is key, and we provide a variety of mounting options, including the ability to mount in limited spaces. Our outlets are available in many finishes and configurations, in addition to a custom color and finish capability for our clients.

Bezel Finish: SOLID BRONZE BRUSHED M-POWER-4TW-AMYR-BZ4B(2)

Custom Finishes Available



Features:

Module/Port Options:


- **Tamper Resistant AC Receptacle** Α
- E USB-A & USB-C (20W)
- Double USB-A (Fast Charging Ports 18W) M
- H HDMI
- CAT 6 6
- 12 RJ 12
- Switched AC Х
- 3-Way Switch (Low Voltage) Y
- USB-C (45W High Speed Charging Port) V
- USB-C (25W High Speed Charging Port) S
- Switched AC (Rocker Switch) D
- **Dimmer Switch** D

Plug:

Supplied with Low Profile Flat 45° Angle 120 VAC Plug

Optional Standard Straight 120 VAC Plug

Optional Straight 120 VAC Pass-through Plug

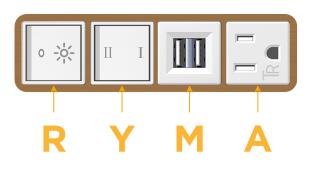

- CLEAN, COMPACT DESIGN
- STREAMLINED
- LOW PROFILE
- SIDE-EXITING CORDS
- **PLUG & PLAY**
- 6' AC CORD & PLUG (FLAT PLUG STANDARD)
- CUSTOMIZABLE CONFIGURATIONS AND FINISHES
- UL LISTED FOR MOUNTING IN FURNITURE
- 15A

UL LISTED AND APPROVED FOR USE ONLY WITH METRO LIGHT & POWER'S UL LISTED LEDS & CLASS 2 UL LISTED LED DRIVERS



METRO LIGHT& POWER M-POWER-4T

AC POWER & DATA CONNECTIVITY SOLUTION

M-POWER-4TW-AMYR-BZ4B(2)

Distributed by




Mormax Company, Inc. 8 Westchester Plaza Elmsford, NY 10523

C 914-699-0101 sales@mormax.com \square

mormax.com



- Α Tamper Resistant AC Receptacle
- Μ Double USB-A (Fast Charging Ports - 18W)
- Y 3-Way Switch
- Switched AC (Rocker Switch) R

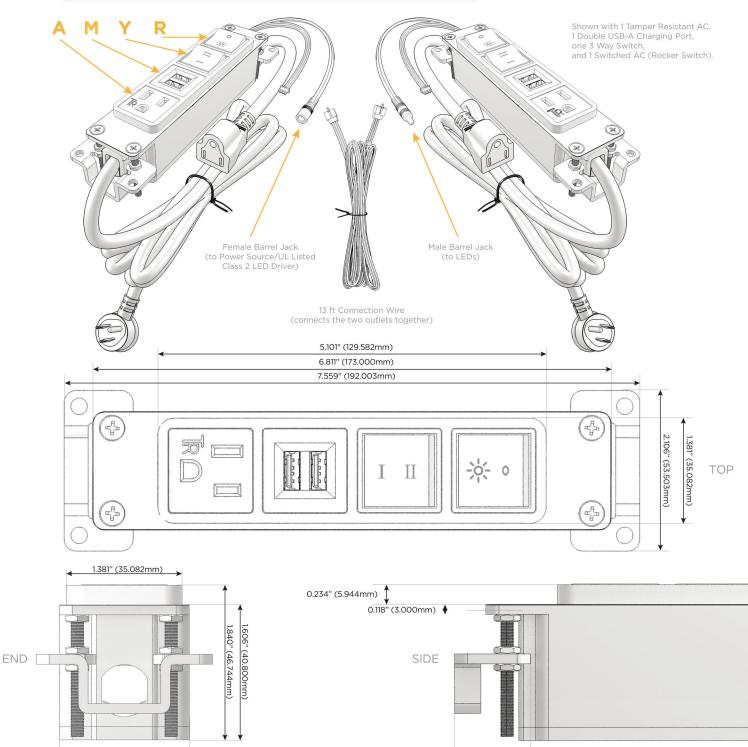

0.905" (23.000mm)

1.555" (39.503mm)