

AC POWER & DATA CONNECTIVITY SOLUTION

M-POWER-4T-AMYR-BR4TP(2)

Distributed by



Mormax Company, Inc.

914-699-0101

8 Westchester Plaza Elmsford, NY 10523 sales@mormax.com
mormax.com

Metro Light & Power's line of power & data solutions offers sophisticated design elements combined with greater ease of installation. Streamlined and low-profile, enhanced by side-exiting cords, our outlets advance the industry with their cutting edge look and feel. We believe flexibility is key, and we provide a variety of mounting options, including the ability to mount in limited spaces. Our outlets are available in many finishes and configurations, in addition to a custom color and finish capability for our clients.

Trim Plate Finish: SOLID BRASS BRUSHED

Custom Finishes Available



M-POWER-4T-AMYR-BR4TP(2)

R Y M A

Features:

Module/Port Options:

- A Tamper Resistant AC Receptacle
- E USB-A & USB-C (20W)
- M Double USB-A (Fast Charging Ports 18W)
- H HDMI
- 6 CAT 6
- 12 RJ 12
- X Switched AC
- Y 3-Way Switch (Low Voltage)
- V USB-C (45W High Speed Charging Port)
- S USB-C (25W High Speed Charging Port)
- R Switched AC (Rocker Switch)
- Dimmer Switch

Plug:

Supplied with Low Profile Flat 45 $^{\circ}$ Angle 120 VAC Plug

Optional Standard Straight 120 VAC Plug

Optional Straight 120 VAC Pass-through Plug

- · CLEAN, COMPACT DESIGN
- STREAMLINED
- LOW PROFILE
- SIDE-EXITING CORDS
- PLUG & PLAY
- 6' AC CORD & PLUG (FLAT PLUG STANDARD)
- CUSTOMIZABLE CONFIGURATIONS AND FINISHES
- UL LISTED FOR MOUNTING IN FURNITURE
- 15A

 \triangle

UL LISTED AND APPROVED FOR USE ONLY WITH METRO LIGHT & POWER'S UL LISTED LEDS & CLASS 2 UL LISTED LED DRIVERS





AC POWER & DATA CONNECTIVITY SOLUTION

M-POWER-4T-AMYR-BR4TP(2)

Distributed by



Mormax Company, Inc. 8 Westchester Plaza

Shown with 1 Tamper Resistant AC, 1 Double USB Charging Port,


and 1 Switched AC (Rocker Switch).

one 3 Way Switch,


914-699-0101

sales@mormax.com mormax.com

Elmsford, NY 10523

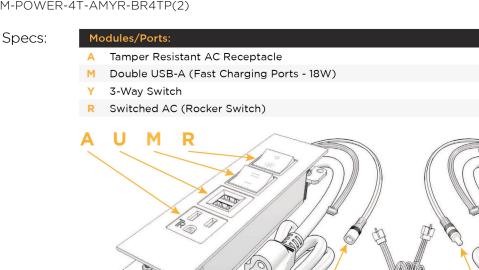

Male Barrel Jack (to LEDs) Female Barrel Jack (to Power Source/UL Listed Class 2 LED Driver) 13 ft Connection Wire (connects the two outlets together) 7.240" (183.903mm) 7.559" (192.003mm) 2.106" (53.503mm) 2.000" (50.800mm)

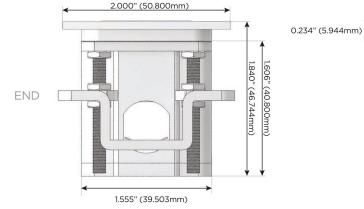

TOP

0.093" (2.381mm) \$ 0.140" (3.563mm) 0.118" (3.000mm) SIDE 0.905" (23.000mm)