

#### AC POWER & DATA CONNECTIVITY SOLUTION

M-POWER-4TW-AMYX-BRTP(2)

Distributed by



Mormax Company, Inc.

8 Westchester Plaza Elmsford, NY 10523


914-699-0101


sales@mormax.com mormax.com

Metro Light & Power's line of power & data solutions offers sophisticated design elements combined with greater ease of installation. Streamlined and low-profile, enhanced by side-exiting cords, our outlets advance the industry with their cutting edge look and feel. We believe flexibility is key, and we provide a variety of mounting options, including the ability to mount in limited spaces. Our outlets are available in many finishes and configurations, in addition to a custom color and finish capability for our clients.

Trim Plate Finish: **SOLID BRASS** Custom Finishes Available

M-POWER-4TW-AMYX-BRTP(2)





#### Features:

### **Module/Port Options:**

- **Tamper Resistant AC Receptacle**
- USB-A & USB-C (20W)
- Double USB-A (Fast Charging Ports 18W)
- HDMI
- CAT 6
- 12 RJ 12
- X Switched AC
- 3-Way Switch (Low Voltage)
- V USB-C (45W High Speed Charging Port)
- S USB-C (25W High Speed Charging Port)
- R Switched AC (Rocker Switch)
- D **Dimmer Switch**

## Plug:

Supplied with Low Profile Flat 45° Angle 120 VAC

Optional Standard Straight 120 VAC Plug

Optional Straight 120 VAC Pass-through Plug

- CLEAN, COMPACT DESIGN
- **STREAMLINED**
- LOW PROFILE
- SIDE-EXITING CORDS
- **PLUG & PLAY**
- 6' AC CORD & PLUG (FLAT PLUG STANDARD)
- **CUSTOMIZABLE CONFIGURATIONS AND FINISHES**
- **UL LISTED FOR MOUNTING IN FURNITURE**
- 15A

UL LISTED AND APPROVED FOR USE ONLY WITH METRO LIGHT & POWER'S UL LISTED LEDS & CLASS 2 UL LISTED LED DRIVERS





Specs:

END

### AC POWER & DATA CONNECTIVITY SOLUTION

M-POWER-4TW-AMYX-BRTP(2)

# Distributed by



Mormax Company, Inc. 8 Westchester Plaza

Elmsford, NY 10523


914-699-0101

mormax.com

sales@mormax.com

# Modules/Ports:

- Tamper Resistant AC Receptacle
- Double USB-A (Fast Charging Ports 18W)
- 3-Way Switch
- Switched AC

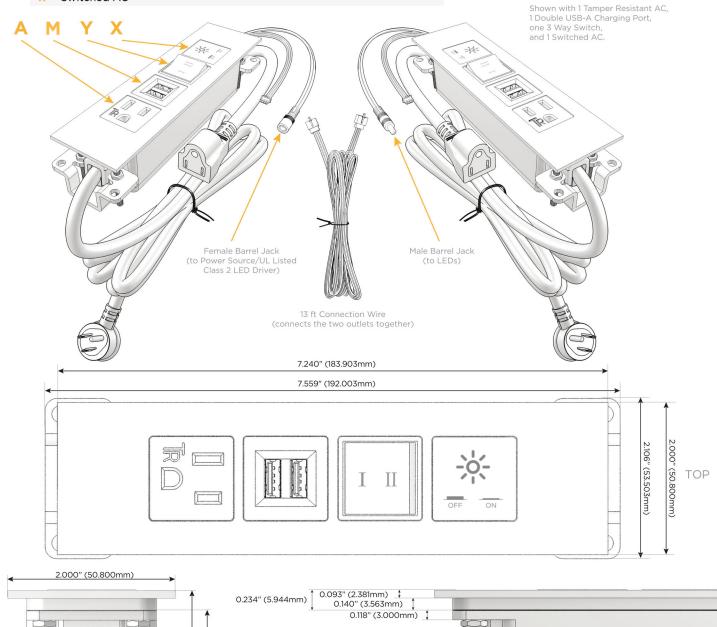

SIDE

0.905" (23.000mm)

1.840" (46.744mm) .606" (40.800mm)

1.555" (39.503mm)