

AC POWER & DATA CONNECTIVITY SOLUTION

M-POWER-5T-AMS6H-BB

Distributed by



Mormax Company, Inc.
8 Westchester Plaza

Elmsford, NY 10523

⊗ ∑

914-699-0101 sales@mormax.com

mormax.com

Metro Light & Power's line of power & data solutions offers sophisticated design elements combined with greater ease of installation. Streamlined and low-profile, enhanced by side-exiting cords, our outlets advance the industry with their cutting edge look and feel. We believe flexibility is key, and we provide a variety of mounting options, including the ability to mount in limited spaces. Our outlets are available in many finishes and configurations, in addition to a custom color and finish capability for our clients.

Bezel Finish: BLACK (STEEL)
Custom Finishes Available M-POWER-5T-AMS6H-BB

A M S 6 H

Features:

Module/Port Options:

- A Tamper Resistant AC Receptacle
- E USB-A & USB-C (20W)
- M Double USB-A (Fast Charging Ports 18W)
- H HDMI
- 6 CAT 6
- 12 RJ 12
- X Switched AC
- Y 3-Way Switch (Low Voltage)
- V USB-C (45W High Speed Charging Port)
- S USB-C (25W High Speed Charging Port)
- R Switched AC (Rocker Switch)
- D Dimmer Switch

Plug:

Supplied with Low Profile Flat 45° Angle 120 VAC Plug

Optional Standard Straight 120 VAC Plug

Optional Straight 120 VAC Pass-through Plug

- · CLEAN, COMPACT DESIGN
- STREAMLINED
- LOW PROFILE
- SIDE-EXITING CORDS
- PLUG & PLAY
- 6' AC CORD & PLUG (FLAT PLUG STANDARD)
- CUSTOMIZABLE CONFIGURATIONS AND FINISHES
- UL LISTED FOR MOUNTING IN FURNITURE
- 15A





AC POWER & DATA CONNECTIVITY SOLUTION

M-POWER-5T-AMS6H-BB

Distributed by

MORMAX

Mormax Company, Inc.

914-699-0101

sales@mormax.com mormax.com


Specs:

8 Westchester Plaza Elmsford, NY 10523 **Modules/Ports:** TOP **Tamper Resistant AC Receptacle** 1.381" (35.082mm) Double USB-A (Fast Charging Ports - 18W) 2.106" (53.503mm) USB-C (25W High Speed Charging Port) CAT 6 HDMI 8.799" (223.503mm) 8.051" (204.500mm) 6.341" (161.082mm)

0.619"

(15.746mm)


0.984" (25.00mm)



1.233" (31.340mm)

0.613" (15.594mm)

Ø 1132" (28.766mm)

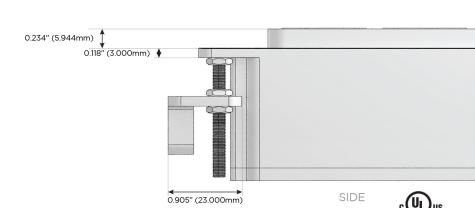

Optional Straight 120 VAC

Pass-through Plug

(29.00mm)

(43.300mm)

(63.900mm)