

AC POWER & DATA CONNECTIVITY SOLUTION

M-POWER-5T-AMS6H-S3AB

Distributed by



Mormax Company, Inc.

914-699-0101 sales@mormax.com

mormax.com


8 Westchester Plaza Elmsford, NY 10523

Metro Light & Power's line of power & data solutions offers sophisticated design elements combined with greater ease of installation. Streamlined and low-profile, enhanced by side-exiting cords, our outlets advance the industry with their cutting edge look and feel. We believe flexibility is key, and we provide a variety of mounting options, including the ability to mount in limited spaces. Our outlets are available in many finishes and configurations, in addition to a custom color and finish capability for our clients.

Bezel Finish: **GUNMETAL (ABS)**

Custom Finishes Available

M-POWER-5T-AMS6H-S3AB

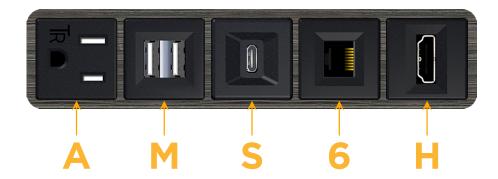

Features:

Module/Port Options:

- **Tamper Resistant AC Receptacle**
- USB-A & USB-C (20W)
- Double USB-A (Fast Charging Ports 18W)
- **HDMI**
- CAT 6
- **RJ 12**
- Switched AC
- 3-Way Switch (Low Voltage)
- V USB-C (45W High Speed Charging Port)
- USB-C (25W High Speed Charging Port)
- R Switched AC (Rocker Switch)
- D Dimmer Switch

Plug:

Supplied with Low Profile Flat 45° Angle 120 VAC Plug

Optional Standard Straight 120 VAC Plug

Optional Straight 120 VAC Pass-through Plug

- CLEAN, COMPACT DESIGN
- **STREAMLINED**
- **LOW PROFILE**
- SIDE-EXITING CORDS
- **PLUG & PLAY**
- 6' AC CORD & PLUG (FLAT PLUG STANDARD)
- **CUSTOMIZABLE CONFIGURATIONS AND FINISHES**
- **UL LISTED FOR MOUNTING IN FURNITURE**
- 15A





AC POWER & DATA CONNECTIVITY SOLUTION

M-POWER-5T-AMS6H-S3AB

Distributed by



Mormax Company, Inc.

914-699-0101

TOP

1.381" (35.082mm)

2.106" (53.503mm)

sales@mormax.com

8 Westchester Plaza

mormax.com


Specs:

Elmsford, NY 10523 **Modules/Ports: Tamper Resistant AC Receptacle** Double USB-A (Fast Charging Ports - 18W) USB-C (25W High Speed Charging Port) CAT 6 HDMI 8.799" (223.503mm) 8.051" (204.500mm) 6.341" (161.082mm)

0.619"

(15.746mm)


0.984" (25.00mm)



1.233" (31.340mm)

0.613" (15.594mm)

Ø 1132" (28.766mm)

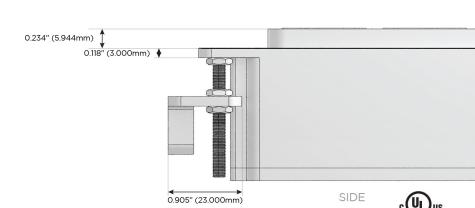

Optional Straight 120 VAC

Pass-through Plug

(29.00mm)

(43.300mm)

(63.900mm)