

#### AC POWER & DATA CONNECTIVITY SOLUTION

M-POWER-5TW-AMS6H-BZAB

Distributed by



Mormax Company, Inc. 8 Westchester Plaza

Elmsford, NY 10523


914-699-0101

sales@mormax.com mormax.com

Metro Light & Power's line of power & data solutions offers sophisticated design elements combined with greater ease of installation. Streamlined and low-profile, enhanced by side-exiting cords, our outlets advance the industry with their cutting edge look and feel. We believe flexibility is key, and we provide a variety of mounting options, including the ability to mount in limited spaces. Our outlets are available in many finishes and configurations, in addition to a custom color and finish capability for our clients.

Bezel Finish: STANDARD BRONZE (ABS)

Custom Finishes Available M-POWER-5TW-AMS6H-BZAB

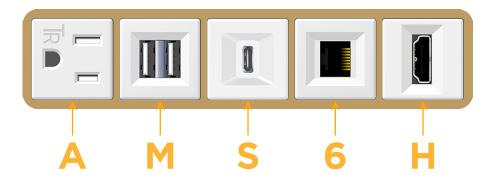

### Features:

## **Module/Port Options:**

- **Tamper Resistant AC Receptacle**
- USB-A & USB-C (20W)
- Double USB-A (Fast Charging Ports 18W)
- **HDMI**
- CAT 6
- **RJ 12**
- Switched AC
- 3-Way Switch (Low Voltage)
- V USB-C (45W High Speed Charging Port)
- USB-C (25W High Speed Charging Port)
- R Switched AC (Rocker Switch)
- D Dimmer Switch

## Plug:

Supplied with Low Profile Flat 45° Angle 120 VAC Plug

Optional Standard Straight 120 VAC Plug

Optional Straight 120 VAC Pass-through Plug

- CLEAN, COMPACT DESIGN
- **STREAMLINED**
- **LOW PROFILE**
- SIDE-EXITING CORDS
- **PLUG & PLAY**
- 6' AC CORD & PLUG (FLAT PLUG STANDARD)
- **CUSTOMIZABLE CONFIGURATIONS AND FINISHES**
- **UL LISTED FOR MOUNTING IN FURNITURE**
- 15A





#### AC POWER & DATA CONNECTIVITY SOLUTION

## Distributed by



Mormax Company, Inc.

8 Westchester Plaza


914-699-0101

sales@mormax.com

mormax.com




# M-POWER-5TW-AMS6H-BZAB Elmsford, NY 10523 **Modules/Ports:** TOP **Tamper Resistant AC Receptacle** 1.381" (35.082mm) Double USB-A (Fast Charging Ports - 18W) 2.106" (53.503mm) USB-C (25W High Speed Charging Port) CAT 6 HDMI 8.799" (223.503mm) 8.051" (204.500mm) 6.341" (161.082mm) Optional Straight 120 VAC 1.233" (31.340mm) 0.619" Pass-through Plug (15.746mm) 0.984" (25.00mm) (29.00mm)



0.613" (15.594mm)

Ø 1132" (28.766mm)

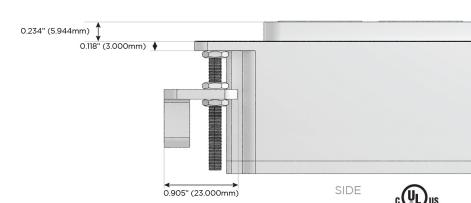

(43.300mm)

(63.900mm)