

AC POWER & DATA CONNECTIVITY SOLUTION

M-POWER-5TW-AMS6H-SS8B

Distributed by



Mormax Company, Inc.
8 Westchester Plaza

Elmsford, NY 10523

so


914-699-0101 sales@mormax.com

mormax.com

Metro Light & Power's line of power & data solutions offers sophisticated design elements combined with greater ease of installation. Streamlined and low-profile, enhanced by side-exiting cords, our outlets advance the industry with their cutting edge look and feel. We believe flexibility is key, and we provide a variety of mounting options, including the ability to mount in limited spaces. Our outlets are available in many finishes and configurations, in addition to a custom color and finish capability for our clients.

Bezel Finish: STAINLESS STEEL MIRROR FINISH

Custom Finishes Available M-POWER-5TW-AMS6H-SS8B

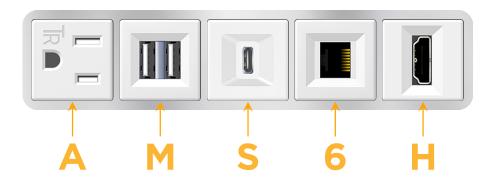

Features:

Module/Port Options:

- A Tamper Resistant AC Receptacle
- E USB-A & USB-C (20W)
- M Double USB-A (Fast Charging Ports 18W)
- H HDMI
- 6 CAT 6
- 12 RJ 12
- X Switched AC
- Y 3-Way Switch (Low Voltage)
- V USB-C (45W High Speed Charging Port)
- S USB-C (25W High Speed Charging Port)
- R Switched AC (Rocker Switch)
- D Dimmer Switch

Plug:

Supplied with Low Profile Flat 45 $^{\circ}$ Angle 120 VAC Plug

Optional Standard Straight 120 VAC Plug

Optional Straight 120 VAC Pass-through Plug

- · CLEAN, COMPACT DESIGN
- STREAMLINED
- LOW PROFILE
- SIDE-EXITING CORDS
- PLUG & PLAY
- 6' AC CORD & PLUG (FLAT PLUG STANDARD)
- CUSTOMIZABLE CONFIGURATIONS AND FINISHES
- UL LISTED FOR MOUNTING IN FURNITURE
- 15A





AC POWER & DATA CONNECTIVITY SOLUTION

M-POWER-5TW-AMS6H-SS8B

Distributed by



Mormax Company, Inc.

914-699-0101

8 Westchester Plaza

sales@mormax.com mormax.com

Elmsford, NY 10523 **Modules/Ports:**

Specs: TOP **Tamper Resistant AC Receptacle** 1.381" (35.082mm) Double USB-A (Fast Charging Ports - 18W) 2.106" (53.503mm) USB-C (25W High Speed Charging Port) CAT 6 HDMI 8.799" (223.503mm) 8.051" (204.500mm) 6.341" (161.082mm) Optional Straight 120 VAC 1.233" (31.340mm) 0.619" Pass-through Plug (15.746mm) 0.984" (25.00mm) (29.00mm) 0.613" (15.594mm) (43.300mm) Ø 1132" (28.766mm) (63.900mm)

