

AC POWER & DATA CONNECTIVITY SOLUTION

M-POWER-5TW-AMSYX-SS8B(2)

Distributed by



Mormax Company, Inc. 8 Westchester Plaza

Elmsford, NY 10523

914-699-0101 sales@mormax.com


mormax.com

Metro Light & Power's line of power & data solutions offers sophisticated design elements combined with greater ease of installation. Streamlined and low-profile, enhanced by side-exiting cords, our outlets advance the industry with their cutting edge look and feel. We believe flexibility is key, and we provide a variety of mounting options, including the ability to mount in limited spaces. Our outlets are available in many finishes and configurations, in addition to a custom color and finish capability for our clients.

Bezel Finish: STAINLESS STEEL MIRROR FINISH

Custom Finishes Available M-POWER-5TW-AMSYX-SS8B(2)



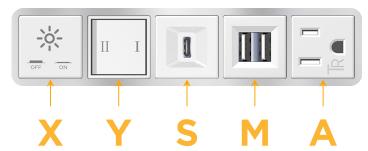

Features:

Module/Port Options:

- **Tamper Resistant AC Receptacle**
- **USB-A & USB-C (20W)**
- Double USB-A (Fast Charging Ports 18W)
- **HDMI**
- CAT 6 6
- 12 RJ 12
- Switched AC
- 3-Way Switch (Low Voltage)
- USB-C (45W High Speed Charging Port)
- USB-C (25W High Speed Charging Port)
- Switched AC (Rocker Switch)
- **Dimmer Switch**

Plug:

Supplied with Low Profile Flat 45° Angle 120 VAC Plug

Optional Standard Straight 120 VAC Plug

Optional Straight 120 VAC Pass-through Plug

- · CLEAN, COMPACT DESIGN
- **STREAMLINED**
- **LOW PROFILE**
- SIDE-EXITING CORDS
- **PLUG & PLAY**
- 6' AC CORD & PLUG (FLAT PLUG STANDARD)
- **CUSTOMIZABLE CONFIGURATIONS AND FINISHES**
- **UL LISTED FOR MOUNTING IN FURNITURE**
- 15A

UL LISTED AND APPROVED FOR USE ONLY WITH METRO LIGHT & POWER'S UL LISTED LEDS & CLASS 2 UL LISTED LED DRIVERS





Specs:

AC POWER & DATA CONNECTIVITY SOLUTION

Modules/Ports:

Tamper Resistant AC Receptacle

Double USB-A (Fast Charging Ports - 18W)

M-POWER-5TW-AMSYX-SS8B(2)

Distributed by




Mormax Company, Inc.

914-699-0101

sales@mormax.com
mormax.com

8 Westchester Plaza Elmsford, NY 10523



Optional Straight 120 VAC Pass-through Plug

1 141"


1.704" (43.300mm)





8.799" (223.503mm)



0.984

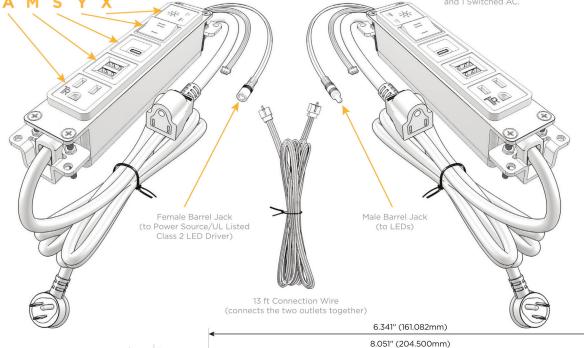





TOP

