

M-POWER-STW-RAMSR-SS4AB

M-POWER-51W-RAMSR-SS4A

Distributed by



Mormax Company, Inc. 8 Westchester Plaza Elmsford, NY 10523 914-699-0101

] sales@mormax.com


6 mormax.com

Metro Light & Power's line of power & data solutions offers sophisticated design elements combined with greater ease of installation. Streamlined and low-profile, enhanced by side-exiting cords, our outlets advance the industry with their cutting edge look and feel. We believe flexibility is key, and we provide a variety of mounting options, including the ability to mount in limited spaces. Our outlets are available in many finishes and configurations, in addition to a custom color and finish capability for our clients.

Bezel Finish: BRUSHED STAINLESS (ABS)

Custom Finishes Available

M-POWER-5TW-RAMSR-SS4AB

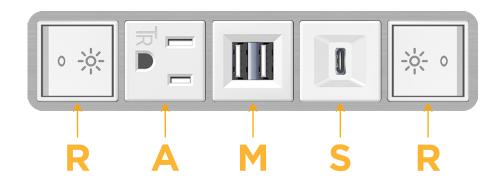

Features:

Module/Port Options:

- A Tamper Resistant AC Receptacle
- E USB-A & USB-C (20W)
- M Double USB-A (Fast Charging Ports 18W)
- H HDMI
- 6 CAT 6
- 12 RJ 12
- X Switched AC
- Y 3-Way Switch (Low Voltage)
- V USB-C (45W High Speed Charging Port)
- S USB-C (25W High Speed Charging Port)
- R Switched AC (Rocker Switch)
- D Dimmer Switch

Plug:

Supplied with Low Profile Flat 45° Angle 120 VAC Plug

Optional Standard Straight 120 VAC Plug

Optional Straight 120 VAC Pass-through Plug

- CLEAN, COMPACT DESIGN
- STREAMLINED
- LOW PROFILE
- SIDE-EXITING CORDS
- PLUG & PLAY
- 6' AC CORD & PLUG (FLAT PLUG STANDARD)
- CUSTOMIZABLE CONFIGURATIONS AND FINISHES
- UL LISTED FOR MOUNTING IN FURNITURE
- 15A





AC POWER & DATA CONNECTIVITY SOLUTION

M-POWER-5TW-RAMSR-SS4AB



Mormax Company, Inc. 8 Westchester Plaza Elmsford, NY 10523 § 914-699-0101
 Sales@mormax.com

 S mormax.com

Specs: Modules/Ports: TOP Switched AC (Rocker Switch) R 1.381" (35.082mm) **Tamper Resistant AC Receptacle** Α 2.106" (53.503mm) Double USB-A (Fast Charging Ports - 18W) Μ USB-C (25W High Speed Charging Port) S T. 9 0 -<u>ò</u>(-To -0: 0 8.051" (204.500mm) 8.799" (223.503mm) 0 6.341" (161.082mm) D D ĪR Optional Straight 120 VAC 1.233" 0.619" Pass-through Plug (31.340mm) (15.746mm) -)0(-1.141″ 0.984" (25.00mm) (29.00mm) 0.613" 0 (15.594mm) AA 1.704″ (43.300mm) R. Ø1132" (28.766mm) 2.515" (63.900mm) 1.381" (35.082mm) 0.234" (5.944mm) 1 0.118" (3.000mm) 🔶 1.606" (40.800mm) 1.840" (46.744mm) END [SIDE 0.905" (23.000mm)

1.555" (39.503mm)

© 2024 Metro Light & Power, LLC. All rights reserved. US Patent No(s) 10,841,990; 10,847,959; other Patents Pending Metro Light & Power, LLC | 11 Smith St Englewood, NJ 07631 | T: 201-416-4160 | F: 208-979-4613 | info@metrolightandpower.com | www.metrolightandpower.com



E491161