

AC POWER & DATA CONNECTIVITY SOLUTION

M-POWER-5T-RAMD-WSTP

Distributed by



Mormax Company, Inc.

914-699-0101 sales@mormax.com


mormax.com

8 Westchester Plaza Elmsford, NY 10523

Metro Light & Power's line of power & data solutions offers sophisticated design elements combined with greater ease of installation. Streamlined and low-profile, enhanced by side-exiting cords, our outlets advance the industry with their cutting edge look and feel. We believe flexibility is key, and we provide a variety of mounting options, including the ability to mount in limited spaces. Our outlets are available in many finishes and configurations, in addition to a custom color and finish capability for our clients.

Trim Plate Finish: WHITE (ZINC/STEEL)

Custom Finishes Available M-POWER-5T-RAMD-WSTP

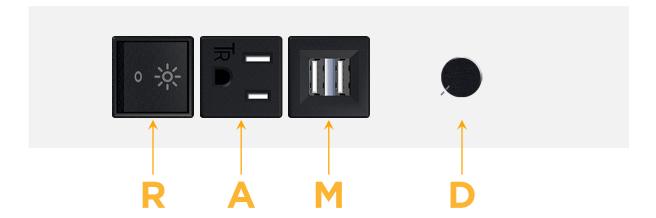

Features:

Module/Port Options:

- **Tamper Resistant AC Receptacle**
- USB-A & USB-C (20W)
- Double USB-A (Fast Charging Ports 18W)
- **HDMI**
- CAT 6
- 12 RJ 12
- X Switched AC
- 3-Way Switch (Low Voltage)
- V USB-C (45W High Speed Charging Port)
- USB-C (25W High Speed Charging Port)
- R Switched AC (Rocker Switch)
- D Dimmer Switch

Plug:

Supplied with Low Profile Flat 45° Angle 120 VAC

Optional Standard Straight 120 VAC Plug

Optional Straight 120 VAC Pass-through Plug

- CLEAN, COMPACT DESIGN
- **STREAMLINED**
- LOW PROFILE
- SIDE-EXITING CORDS
- **PLUG & PLAY**
- 6' AC CORD & PLUG (FLAT PLUG STANDARD)
- **CUSTOMIZABLE CONFIGURATIONS AND FINISHES**
- ETL LISTED FOR MOUNTING IN FURNITURE
- 15A





AC POWER & DATA CONNECTIVITY SOLUTION

M-POWER-5T-RAMD-WSTP

Distributed by



8.480" (215.403mm)

(223.503mm)

8.799" (

Mormax Company, Inc. 8 Westchester Plaza

Elmsford, NY 10523

914-699-0101

sales@mormax.com mormax.com


TOP


2.000" (50.800mm)

2.106" (53.503mm)

Specs: **Modules/Ports:**

- Switched AC (Rocker Switch)
- **Tamper Resistant AC Receptacle**
- Double USB-A (Fast Charging Ports 18W)
- **Dimmer Switch**

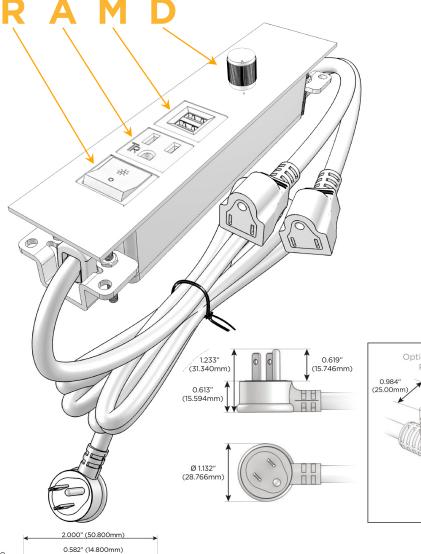



0.093" (2.381mm) ‡ 0.140" (3.563mm)

0.118" (3.000mm)

SIDE

0.234" (5.944mm)



1.555" (39.503mm)

0.905" (23.000mm)