METRO LIGHT & POWER

M-POWER-5T
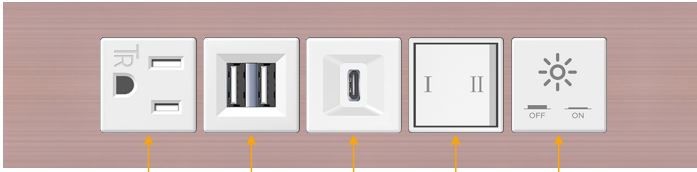## AC POWER & DATA CONNECTIVITY SOLUTION
M-POWER-5TW-AMSYX-CHATP(2)

Metro Light & Power's line of power & data solutions offers sophisticated design elements combined with greater ease of installation. Streamlined and low-profile, enhanced by side-exiting cords, our outlets advance the industry with their cutting edge look and feel. We believe flexibility is key, and we provide a variety of mounting options, including the ability to mount in limited spaces. Our outlets are available in many finishes and configurations, in addition to a custom color and finish capability for our clients.
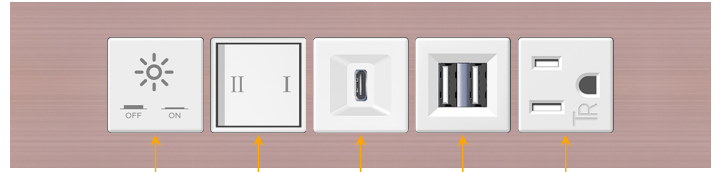
Trim Plate Finish: **CHAMPAGNE (ABS)**
Custom Finishes Available   M-POWER-5TW-AMSYX-CHATP(2)

A M S Y X

X Y S M A

Features:

Module/Port Options:	
A	Tamper Resistant AC Receptacle
E	USB-A & USB-C (20W)
M	Double USB-A (Fast Charging Ports - 18W)
H	HDMI
6	CAT 6
12	RJ 12
X	Switched AC
Y	3-Way Switch (Low Voltage)
V	USB-C (45W High Speed Charging Port)
S	USB-C (25W High Speed Charging Port)
R	Switched AC (Rocker Switch)
D	Dimmer Switch
Plug:	
	Supplied with Low Profile Flat 45° Angle 120 VAC Plug
	Optional Standard Straight 120 VAC Plug
	Optional Straight 120 VAC Pass-through Plug

- CLEAN, COMPACT DESIGN
- STREAMLINED
- LOW PROFILE
- SIDE-EXITING CORDS
- PLUG & PLAY
- 6' AC CORD & PLUG (FLAT PLUG STANDARD)
- CUSTOMIZABLE CONFIGURATIONS AND FINISHES
- UL LISTED FOR MOUNTING IN FURNITURE
- 15A

⚠ **UL LISTED AND APPROVED FOR USE ONLY WITH METRO LIGHT & POWER'S UL LISTED LEDS & CLASS 2 UL LISTED LED DRIVERS**

c(UL)us
LISTED
E491161
FURNITURE POWER DISTRIBUTION UNIT

M-POWER-5T

AC POWER & DATA CONNECTIVITY SOLUTION
M-POWER-5TW-AMSYX-CHATP(2)

Specs:

Modules/Ports:

A	Tamper Resistant AC Receptacle
M	Double USB-A (Fast Charging Ports - 18W)
S	USB-C (25W High Speed Charging Port)
Y	3-Way Switch
X	Switched AC

A M S Y X

Shown with 1 Tamper Resistant AC,
1 Double USB Charging Port,
1 USB-C Charging Port,
one 3-Way Switch,
and 1 Switched AC.

Female Barrel Jack
(to Power Source/UL Listed
Class 2 LED Driver)

Male Barrel Jack
(to LEDs)

13 ft Connection Wire
(connects the two outlets together)

1.233"
(31.340mm)
0.619"
(15.746mm)
0.613"
(15.594mm)

Ø 1.132"
(28.766mm)

Optional Straight 120 VAC
Pass-through Plug
0.984"
(25.00mm)
1.141"
(29.00mm)
1.704"
(43.300mm)
2.515"
(63.900mm)

TOP

8.480" (215.403mm)
8.799" (223.503mm)
2.106" (53.503mm)
2.000" (50.800mm)

TR

I II

OFF   ON

END

2.000" (50.800mm)
1.606" (40.800mm)
1.840" (46.744mm)
1.555" (39.503mm)

SIDE

0.093" (2.381mm)
0.140" (3.563mm)
0.118" (3.000mm)
0.234" (5.944mm)
0.905" (23.000mm)

c(UL)us
LISTED
E491161
FURNITURE POWER DISTRIBUTION UNIT